

6

5

4

3

2





1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/5/04	

PCB LAYOUT

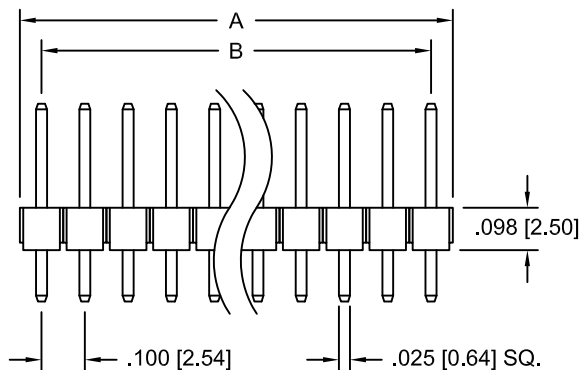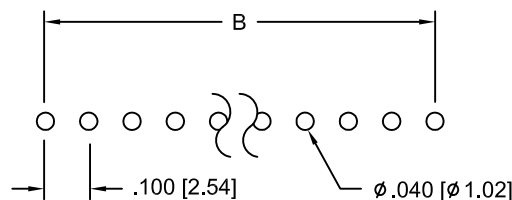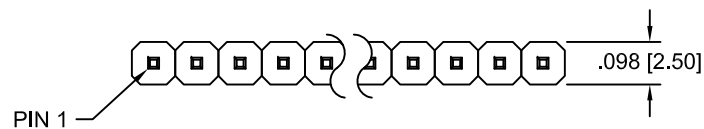

SPECIFICATIONS:

Material:
 Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
 Environment:
 Lead free, RoHS compliant.



A = .100 [2.54] X No. of Positions.
 B = .100 [2.54] X No. of Spaces.
 1 THRU 40 PINS AVAILABLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES HOLES			
.X ± .10	∅.X ± .10	TITLE PIN HEADER, SINGLE ROW, .100 PITCH STRAIGHT, .235 MATING / .120 TAIL	
.XX ± .020	∅.XX ± .015		
.XXX ± .015	∅.XXX ± .010		
APPROVALS		DATE	
DRAWN	SS	10/5/04	
CHECKED		SIZE X	PART NO. PH1-XX-TA
APPROVED		REF:	SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1