


Mechanical Specifications

D	30.0±2.5 mm
T	5.0±1.0 mm
Lead Diameter	1.0±0.1mm
S	7.8±1.0mm
L	13.0±1.0 mm
Coating rundown	5.0 mm Max
C	3.8±0.5mm

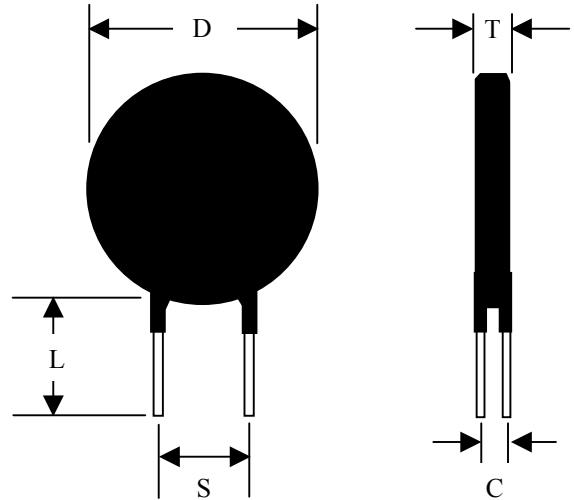

Electrical Specifications

Resistance @ 25°C	10.0 Ω ± 20%
Max Steady State Current Up to 65°C	15.0 A
Max recommended energy rating (Joules)	150.0 J
Actual failure point of instantaneous energy (Joules)	220.0J
Resistance @ 100% of Max Current	0.058 Ω
Resistance @ 50% of Max Current	0.110Ω
Body Temperature @ 100% Current	228°C
Dissipation Constant	45.4mW/°C
Thermal Time Constant	232 seconds
Material Type	"I"

Rev.	Date	Change
0	11/19/19	Issue

**Ametherm, Inc**  
961 Fairview Drive  
Carson City, NV 89701  
Telephone: **800-808-2434**  
Fax: 775 884-0670  
[www.Ametherm.com](http://www.Ametherm.com)